


10/26/00



10-27-00

A

OSTROLENK, FABER, GERB & SOFFEN, LLP

Attorneys at Law

1180 Avenue of the Americas  
New York, New York 10036-8403

(212) 382-0700

Telex  
23 6925

Facsimile  
(212) 382-0888

Cable  
Ostrofaber New York

JC926 U.S. PTO  
09/697542



Express Mail #EL583743078US

Asst. Commissioner for Patents  
Washington, DC 20231

OFGS File No. : P/1071-1154  
Inventor : Kunisaburo TOMONO, et al.  
Title : COMPOSITE MAGNETIC MATERIAL AND  
INDUCTOR ELEMENT  
Assignee : Murata Manufacturing Co., Ltd.

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

- 17 Pages of Specification including Abstract and Claims
- 16 Numbered Claims Calculated as 16 Claims for Fee Purposes
- 3 Formal Drawing Sheets Containing Figures 1 to 5.
- X Declaration and Power of Attorney
- X Priority is Claimed under 35 U.S.C. § 119:
- Convention Date October 27, 1999 for Japanese Appln. S.N. 11-305012
- X Certified Priority Application
- X Assignment
- X Return-Addressed Post Card

OFGS Check No. 001800, which includes the fee of \$750.00, calculated as follows:

Basic Filing Fee:	\$ 710.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$18:	
Number of Independent Claims in Excess of 3, times \$80:	
One or More Multiple Dependent Claims: Total \$270.	
Assignment Recording Fee: \$40	40.00
TOTAL Filing Fee and Assignment Recording Fee:	<u>\$ 750.00</u>

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

Respectfully submitted,

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL583743078US) in an envelope addressed to: Asst. Commissioner for Patents, Washington, D.C. 20231, on October 26, 2000:

Dorothy Jenkins  
Name of Person Mailing Correspondence  
Dorothy Jenkins  
Signature  
October 26, 2000  
Date of Signature

Edward A. Meilman  
Edward A. Meilman  
Registration No.: 24,735  
OSTROLENK, FABER, GERB & SOFFEN, LLP  
1180 Avenue of the Americas  
New York, New York 10036-8403  
Telephone: (212) 382-0700

- 1 -

COMPOSITE MAGNETIC MATERIAL  
AND INDUCTOR ELEMENT

BACKGROUND OF THE INVENTION

1. Field of the Invention

5           The present invention relates to a composite magnetic material comprising a ferrite powder and a resin, and an inductor element constructed by using it. More specifically, it relates to a composite magnetic material and an inductor element advantageous for use in the electronic parts for high-frequency applications.

10          2. Description of the Related Art

          In high-frequency circuits which are used for mobile communication devices including a portable telephone, a radio LAN, etc., an inductor element with a coil structure for covering the frequencies up to several GHz, such as a chip inductor, is used for the purposes of impedance matching, resonance or  
15          for a choke.

          However, the coil was prepared by winding a wire around a core made of a non-magnetic material or by forming a coil pattern on a non-magnetic material, and thus it was necessary to have a large number of coil winding turns so as to obtain a desired impedance, resulting in a restraint toward the  
20          development of miniaturization. Since the resistance of the winding increases

with increasing number of winding turns, there was also a problem that an inductor with a high Q (gain) could not be obtained.

To solve these problems, inductors having, as a core, a ferrite for high-frequency use, have been also investigated. By using a ferrite core, it is possible to decrease the number of coil winding turns in accordance with the permeability of the core material, and to realize miniaturization. However, a ferrite sintered body has a frequency relaxation phenomenon derived from magnetic domain wall motion, and a high Q can be maintained only when the frequency is restricted to a value up to about 300 MHz at the most, even if a ferrox planer type ferrite sintered body (which is believed to have the most excellent high-frequency properties) is used.

#### SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a magnetic material which has a larger permeability in comparison with a non-magnetic material in a frequency band of from several MHz to several GHz, and can maintain a relatively high gain Q up to a frequency band of several GHz.

Another object of the present invention is to provide an inductor element which can be miniaturized and still can provide a high Q, by using the magnetic material described above.

The composite magnetic material comprises a ferrite powder and a resin, and the said ferrite powder comprises a spinel type ferrite including at least Ni and Co.

It is preferable that the ferrite is a spinel type ferrite having a composition represented by  $(\text{NiO})_x(\text{CoO})_y(\text{MeO})_z(\text{Fe}_2\text{O}_3)_{1-x-y-z}$ , wherein Me is at least one selected from the group consisting of Mg, Cu and Zn, and x, y and z each satisfy the following conditions:

- 5            $0.10 \leq x \leq 0.550$ ;  
             $0.025 \leq y \leq 0.200$ ;  
             $0 \leq z \leq 0.200$ ; and  
             $0.400 \leq (x+y+z) \leq 0.600$ .

10           The composite magnetic material is suitably applied to an inductor element.

            According to the present invention, a composite magnetic material can be obtained which can provide a relatively large permeability in the frequency band of from several MHz to several GHz, and which can maintain a high gain Q up to a GHz range.

15           Therefore, an inductor element constructed by using this composite magnetic material as a magnetic member, can realize miniaturization as well as a high Q.

            For the purpose of illustrating the invention, there is shown in the drawings several forms which are presently preferred, it being understood,  
20           however, that the invention is not limited to the precise arrangements and instrumentalities shown.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view illustrating an inductor element 1 according to an embodiment of the present invention, with a part partially broken.

Fig. 2 is a graph showing relationships between the frequencies and the permeabilities  $\mu'$  of the composite magnetic material of sample 8 prepared according to the present invention, and a ferrite sintered body of the comparative example.

Fig. 3 is a graph showing relationships between the frequencies and the gains Q of the composite magnetic material of sample 8 prepared according to the present invention, and a ferrite sintered body of the comparative example.

Fig. 4 is a graph showing a relationship between the CoO amount and the permeability  $\mu'$  in the system with 49.5 mol% of  $\text{Fe}_2\text{O}_3$ .

Fig. 5 is a graph showing a relationship between the CoO amount and the gain Q in the system with 49.5 mol% of  $\text{Fe}_2\text{O}_3$ .

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

A ferrite sintered member material has a magnetization mechanism that it passes through the stage of magnetic domain wall motion relaxation to reach the stage of rotational magnetization resonance starting from a low frequency to a high frequency in the AC magnetic field. From the viewpoint of frequency characteristics of Q of magnetic materials, Q decreases sharply at a frequency in which magnetic domain wall motion relaxation occurs, and further decreases toward the rotational magnetization resonance point.

To maintain a high Q value up to a frequency band of several GHz, it is first necessary to stop the magnetic domain wall motion completely, and then to shift the rotational magnetization resonance frequency to a frequency which is higher than several GHz.

5           As a result of intensive researches by the inventors, it was confirmed that degradation of Q by the magnetic domain wall motion can be completely stopped by dispersing a ferrite powder in a non-magnetic matrix, the powder having such a particle size that allows each of the ferrite particles to remain a single domain particle. In general, the maximum dimension of each particle in  
10           the powder will be about 3  $\mu\text{m}$ .

          It was also found that when Ni in a Ni ferrite is substituted with Co, the rotational magnetization resonance frequency becomes higher with increasing of the substituted amount.

          The inventors of the present invention noticed that properties favorable  
15           for a core for a high-frequency inductor can be obtained by combining the above-described elements and by dispersing a NiCo ferrite powder in a resin at a high concentration to make a composite ferrite material, and found the present invention.

          In other words, the present invention is directed at a composite  
20           magnetic material. This composite magnetic material is characterized in that it contains a ferrite powder and a resin, the ferrite powder comprising a spinel type ferrite including at least Ni and Co.

          In the composite magnetic material according to the present invention, the above-described ferrite is desirably a spinel type ferrite having a

composition represented by  $(\text{NiO})_x(\text{CoO})_y(\text{MeO})_z(\text{Fe}_2\text{O}_3)_{1-x-y-z}$ , wherein Me is at least one selected from the group consisting of Mg, Cu and Zn, and x, y and z each satisfy the following conditions:  $0.10 \leq x \leq 0.550$ ;  $0.025 \leq y \leq 0.200$ ;  $0 \leq z \leq 0.200$ ; and  $0.400 \leq (x+y+z) \leq 0.600$ .

5 In the above-described composition, a part of the Ni may be substituted with Be, Ca, Sr, Ba, Ti, V, Cr, Me, etc., and a part of the Fe may be substituted with Al, Ga, In, Tl, etc., as long as they do not adversely affect on the magnetic properties of the composite magnetic material.

10 For the resin, any type of resin may be used. Additives such as a resin dispersant may be added to the resin as long as they do not adversely affect on the magnetic properties of the composite material.

15 The composite magnetic material according to the present invention is prepared, different from a ferrite sintered body, by mixing a ferrite powder without magnetic domain wall motion relaxation in a resin. This composite magnetic material can maintain a relatively high Q up to several GHz region since the rotational magnetization resonance frequency of a ferrite powder is raised to a frequency higher than several GHz.

20 Fig. 1 is a perspective view illustrating the appearance of an inductor element 1 according to an embodiment of the present invention. In Fig. 1, the inductor element 1 is shown as partially broken.

The inductor element 1 constitutes a chip inductor, and is equipped with a cylindrical core 2. A coated winding 3 is wound over the outer periphery of the core 2. Each end of the core 2 is covered with a cap type metallic terminal member 4 or 5.

The coating of both ends of the winding 3 is peeled off and one of the ends with the coating thus peeled off is electrically connected to the terminal member 4, and the other end is electrically connected to the terminal member 5, respectively.

The composite magnetic material according to the present invention can be used advantageously, for example, as a material for constituting a core 2 for use in the above-described inductor element 1, or as a magnetic member for use in an inductor element of a different structure.

The composite magnetic material according to the present invention has the above-described composition. The details will be explained below based on the examples.

### EXAMPLES

Various kinds of metal oxides as raw materials were prepared and wet blended with a ball mill for 24 hours to make ferrite compositions (in molar ratio) shown in Table 1.

Table 1						
Sample No.	NiO	CoO	MgO	CuO	ZnO	Fe <sub>2</sub> O <sub>3</sub>
* 1	0.050	0.200	0	0.150	0	0.600
2	0.100	0.200	0	0.100	0	0.600
3	0.550	0.050	0	0	0	0.400
* 4	0.575	0.025	0	0	0	0.400
* 5	0.505	0	0	0	0	0.495
* 6	0.495	0.010	0	0	0	0.495
7	0.480	0.025	0	0	0	0.495
8	0.455	0.050	0	0	0	0.495



Table 1 - Cont'd						
Sample No.	NiO	CoO	MgO	CuO	ZnO	Fe <sub>2</sub> O <sub>3</sub>
9	0.405	0.100	0	0	0	0.495
10	0.355	0.150	0	0	0	0.495
11	0.305	0.200	0	0	0	0.495
* 12	0.255	0.250	0	0	0	0.495
* 13	0.205	0.300	0	0	0	0.495
14	0.405	0.050	0.050	0	0	0.495
15	0.405	0.050	0	0.050	0	0.495
16	0.405	0.050	0	0	0.050	0.495
17	0.305	0.100	0.100	0	0	0.495
18	0.205	0.100	0.200	0	0	0.495
* 19	0.105	0.100	0.300	0	0	0.495
* 20	0.550	0.100	0	0	0	0.350
21	0.500	0.100	0	0	0	0.400
22	0.450	0.100	0	0	0	0.450
23	0.350	0.100	0	0	0	0.550
24	0.300	0.100	0	0	0	0.600
* 25	0.250	0.100	0	0	0	0.650

Next, the above-described mixed powder was calcined in the air at a temperature of 1,000°C for 2 hours, and then was wet-ground with a ball mill for 24 hours.

The ferrite powder thus obtained was subjected to a measurement of the real density by the gas substitution method. Using the result, the ferrite powder and a polypropylene resin were compounded in a volume ratio of 50/50 to prepare a composite material.

Next, the above-described composite material was blended with a hot roll, and then was compression-pressed to make a cylindrical test piece having a diameter of 8 mm and an axial line direction length of 15 mm. The test piece

was lathed, and then was subjected to the evaluation of magnetic properties at frequencies of 500 MHz, 1 GHz and 2 GHz, respectively, by the S-parameter method.

Also, as a comparative example, a Ni (Mg, Cu) ferrite sintered body was prepared, and was subjected to the evaluation of magnetic properties according to the same methods as the above-described methods.

Table 2 shows the real number parts  $\mu'$  of complex permeabilities and the gain Q values of the composite magnetic materials from the samples in Table 1 for which magnetic properties were evaluated as described above, and a sintered body according to the above-described comparative example, respectively.

Table 2						
Sample No.	$\mu'$			Q		
	500MHz	1GHz	2GHz	500MHz	1GHz	2GHz
* 1	1.2	1.2	1.2	200	200	190
2	1.5	1.5	1.5	190	190	190
3	1.8	1.8	1.7	190	190	170
* 4	1.3	1.3	1.3	190	190	180
* 5	2.5	2.5	2.2	18	8	4
* 6	2.5	2.8	2.4	80	10	2
7	2.2	2.2	2.1	150	150	80
8	2.0	2.0	2.0	180	180	150
9	1.8	1.8	1.8	180	180	160
10	1.7	1.7	1.7	180	180	160
11	1.5	1.5	1.5	190	190	170
* 12	1.2	1.2	1.2	200	200	190
* 13	1.1	1.1	1.1	200	200	200
14	1.8	1.8	1.8	180	180	160

Table 2 - Cont'd						
Sample No.	$\mu'$			Q		
	500MHz	1GHz	2GHz	500MHz	1GHz	2GHz
15	1.8	1.8	1.8	180	180	150
16	2.2	2.2	2.2	100	100	80
17	2.0	2.0	2.0	160	160	150
18	2.2	2.2	2.1	160	160	140
* 19	2.6	2.6	2.5	100	10	4
* 20	1.3	1.3	1.3	200	200	200
21	1.7	1.7	1.6	190	190	180
22	1.8	1.8	1.8	180	180	160
23	1.8	1.8	1.8	180	180	170
24	1.6	1.6	1.6	190	190	190
* 25	1.2	1.2	1.2	200	200	200
Comparative example	7.6	4.9	2.6	2	<1	<1

Fig. 2 shows relationships between the frequencies and permeabilities  $\mu'$  of sample 8 and the comparative example to compare them. Fig. 3 shows relationships between the frequencies and the gains Q in a similar way. Fig. 4 shows a relationship between the CoO amount and the permeability  $\mu'$  at a frequency of 2 GHz in a system with 49.5 mol% of  $\text{Fe}_2\text{O}_3$ . Fig. 5 shows a relationship between the CoO amount and the gain Q at a frequency of 2 GHz in a similar way.

When Fig. 2, Fig. 3 and Table 2 are referenced, in comparison with the comparative example, samples 1 to 25, except for sample 5 which is outside of the present invention as it does not contain Co, have a tendency to show, in general, relatively good magnetic properties, that is, a good permeability  $\mu'$  and a good gain Q up to the GHz region, without decrease of magnetic

properties derived from magnetic wall resonance, though the permeability is decreased by the influence of the resin which is non-magnetic.

With reference to Table 1, the amount of NiO is changed in the range of 0.050-0.575 mol% in samples 1-4, the amount of CoO is changed in the range of 0-0.300 mol% in samples 5-13, a part of the amount of NiO is substituted with MgO, CuO or ZnO in samples 14-19, and the amount of MgO is changed in the range of 0.050-0.300 mol%, and the amount of  $\text{Fe}_2\text{O}_3$  is changed in the range of 0.350-0.650 mol% in samples 20-25.

In a preferred embodiment according to the present invention, as described above, the ferrite is a spinel type ferrite having a composition represented by  $(\text{NiO})_x(\text{CoO})_y(\text{MeO})_z(\text{Fe}_2\text{O}_3)_{1-x-y-z}$ , wherein Me is at least one selected from the group consisting of Mg, Cu and Zn, and x, y and z each satisfy the following conditions:  $0.10 \leq x \leq 0.550$ ;  $0.025 \leq y \leq 0.200$ ;  $0 \leq z \leq 0.200$ ; and  $0.400 \leq (x+y+z) \leq 0.600$ .

In Table 1 and Table 2, those out of the category of this preferred embodiment have sample numbers marked with the symbol "\*".

The range of composition which is in this range of preferred embodiment of the present invention can be confirmed by referencing Table 1 and Table 2.

In samples 1-4, samples 2 and 3 are within the preferred range, and samples 1 and 4 are out of the preferred range. When samples 1-4 are compared with each other, sample 1 with a NiO amount of less than 0.10 in molar ratio and sample 4 with a NiO amount of more than 0.550 in molar ratio have lower permeabilities  $\mu'$  than those of samples 2 and 3.

In samples 5-13, samples 7-11 are within the preferred range, and samples 5, 6, 12, and 13 are out of the preferred range. When samples 5-13 are compared with each other, those with CoO having a molar ratio of less than 0.025, such as samples 5 and 6, show a decreased gain Q, though a relatively high permeability  $\mu'$  is obtained. On the other hand, when the amount of CoO exceeds 0.200 in molar ratio as is in the cases of samples 12 and 13, the permeability  $\mu'$  decreases, though a relatively high gain Q is obtained.

The above-described behaviors can be confirmed by Figs. 4 and 5. Thus, relatively good magnetic properties are observed both in the permeability  $\mu'$  and the gain Q, when the amount of Co is not less than 2.5 mol% and not more than 20 mol%.

In samples 14-19, samples 14-18 are within the preferred range, and samples 19 is out of the preferred range. When MgO as a substituent exceeds 0.200 in molar ratio as in the case of sample 19, the gain Q decreases, though a relatively high permeability  $\mu'$  is obtained.

Furthermore, in order to consider the effects obtained by substituting a part of Ni with Mg, Cu, or Zn as are shown in samples 14-19, comparison was made between sample 8 and samples 14-16, whereby the total molar ratio of NiO plus MgO, CuO or ZnO was the same. No large decrease in magnetic properties was observed. When samples 17-19 were compared with sample 9, a higher permeability  $\mu'$  was obtained, though there was a tendency of decreasing in gain Q.

While preferred embodiments of the invention have been disclosed, various modes of carrying out the principles disclosed herein are contemplated as being within the scope of the following claims. Therefore, it is understood that the scope of the invention is not to be limited except as otherwise set forth in the claims.

5

00471305.1

WHAT IS CLAIMED IS:

1. A composite magnetic material comprising a ferrite powder and a resin, wherein said ferrite powder comprises a Ni and Co containing spinel ferrite.

2. A composite magnetic material according to claim 1, wherein said ferrite comprises at least one of Be, Ca, Sr, Ba, Ti, V, Cr, Mg, Cu, Zn, Ga, In and Tl.

3. A composite magnetic material according to claim 2, wherein said ferrite is a spinel type ferrite having a composition represented by



wherein

5 Me is at least one selected from the group consisting of Mg, Cu and Zn,

$$0.10 \leq x \leq 0.550;$$

$$0.025 \leq y \leq 0.200;$$

$$0 \leq z \leq 0.200; \text{ and}$$

10  $0.400 \leq (x+y+z) \leq 0.600.$

4. A composite magnetic material according to claim 3, wherein x is 205-480, y is 0.5-0.1 and  $0.450 \leq (x+y+z) \leq 0.550.$

5. A composite magnetic material according to claim 4, wherein  $z$  is 0.
6. A composite magnetic material according to claim 3, wherein Me is Mg.
7. A composite magnetic material according to claim 3, wherein Me is Cu.
8. A composite magnetic material according to claim 3, wherein Me is Zn.
9. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 8.
10. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 7.
11. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 6.
12. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 5.



13. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 4.

14. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 3.

15. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 2.


16. An inductor element equipped with a magnetic member comprising a composite magnetic material according to claim 1.

00471305.1


COMPOSITE MAGNETIC MATERIAL  
AND INDUCTOR ELEMENT

ABSTRACT OF THE DISCLOSURE

A composite magnetic material comprises a ferrite powder and a resin in which the ferrite powder comprises a spinel type ferrite including at least Ni and Co.

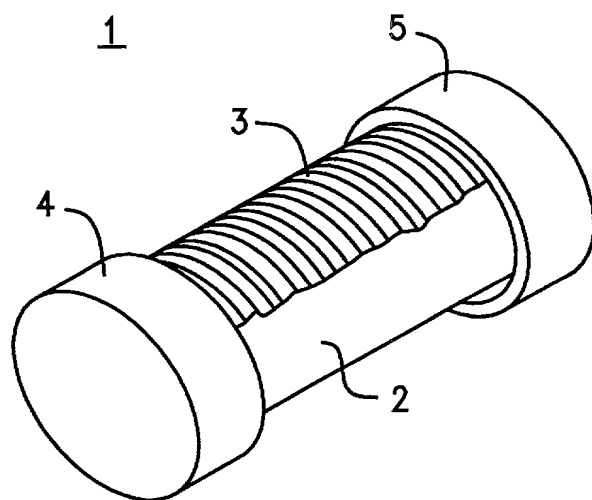

**FIG. 1**

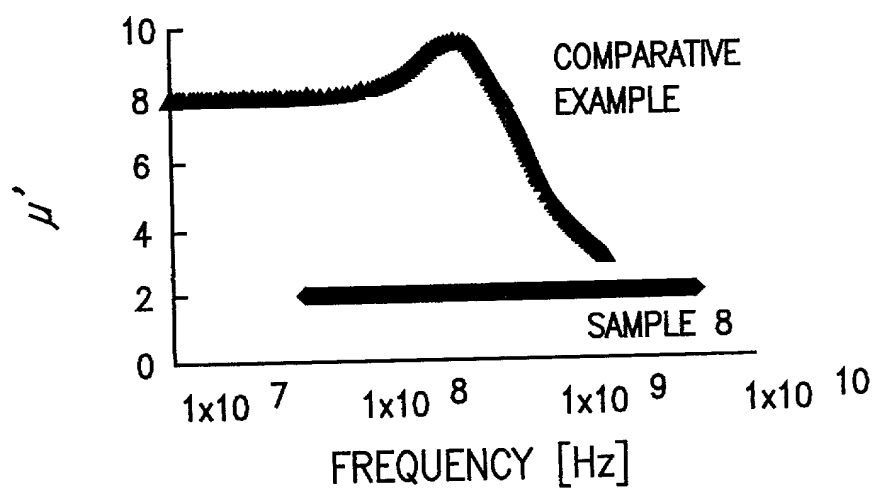

**FIG. 2**

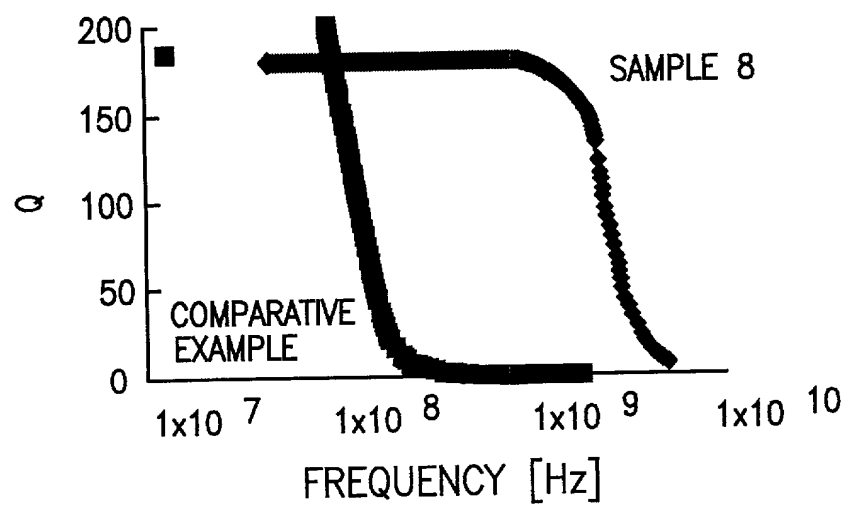


FIG. 3


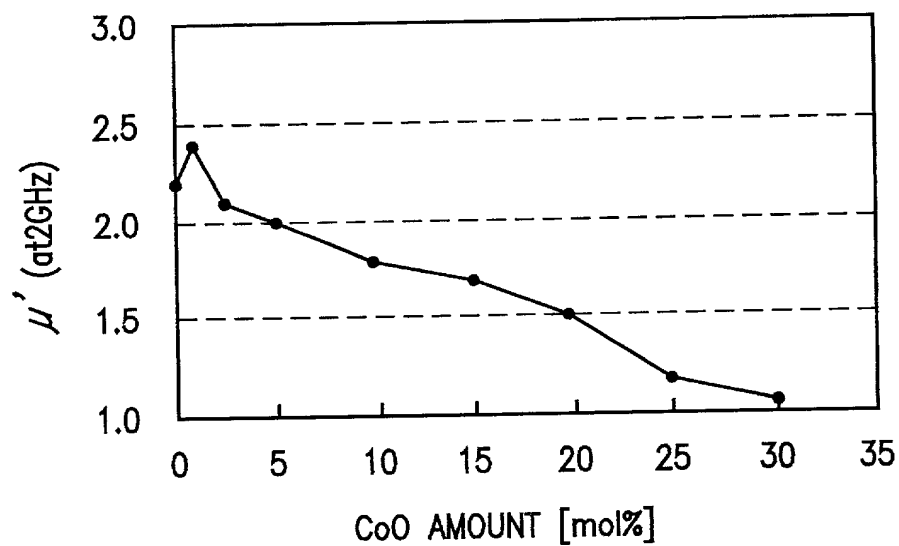


FIG. 4

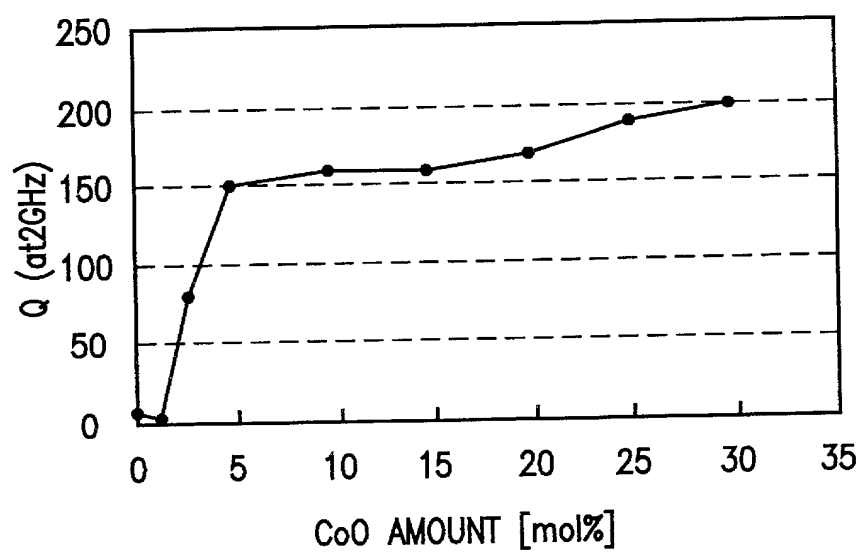

*FIG. 5*

UNITED STATES OF AMERICA  
COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

OFGS FILE NO.  
P/1071-1154

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**COMPOSITE MAGNETIC MATERIAL AND INDUCTOR ELEMENT**

the specification of which is attached hereto, unless the following box is checked:

☐ was filed on \_\_\_\_\_ as United States patent Application Number or PCT International patent application number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign or Provisional Application(s)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	11-305012	October 27, 1999	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)

I hereby appoint customer no. 2352 OSTROLENK, FABER, GERB & SOFFEN, LLP, and the members of the firm, Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944; Louis C. Dujmich - Reg. No. 30,625 and Douglas A. Miro - Reg. No. 31,643, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.

SEND CORRESPONDENCE TO: **OSTROLENK, FABER, GERB & SOFFEN, LLP** DIRECT TELEPHONE CALLS TO:  
1180 AVENUE OF THE AMERICAS (212) 382-0700  
NEW YORK, NEW YORK 10036-8403  
CUSTOMER NO. 2352

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR <b>Kunisaburo TOMONO</b>		INVENTOR'S SIGNATURE <i>K. Tomono</i>	DATE <i>October, 20, 2000</i>
RESIDENCE (City and either State or Foreign Country) <b>Otsu-shi, Shiga-ken, Japan</b>		COUNTRY OF CITIZENSHIP <b>Japan</b>	
POST OFFICE ADDRESS <b>c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan</b>			
FULL NAME OF SECOND JOINT INVENTOR (IF ANY) <b>Takashi TODA</b>		INVENTOR'S SIGNATURE <i>Takashi Toda</i>	DATE <i>October 20, 2000</i>
RESIDENCE (City and either State or Foreign Country) <b>Kusatsu-shi, Shiga-ken, Japan</b>		COUNTRY OF CITIZENSHIP <b>Japan</b>	
POST OFFICE ADDRESS <b>c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan</b>			

☒ CONTINUED ON PAGE 2

